

Achieve peak performance with a new kind of inkjet.


Xerox® Trivor® 2400 HF Inkjet Press



Achieve new levels of performance with a whole new kind of inkjet.

The Xerox® Trivor® 2400 HF Inkjet Press is revolutionising inkjet with High Fusion Inks. These specially formulated aqueous inks achieve outstanding visual resolution on standard offset papers without primers or treatments, turning high-value jobs into optimal candidates for inkjet production.

Get the efficiency of inkjet with the impact of exceptional quality.

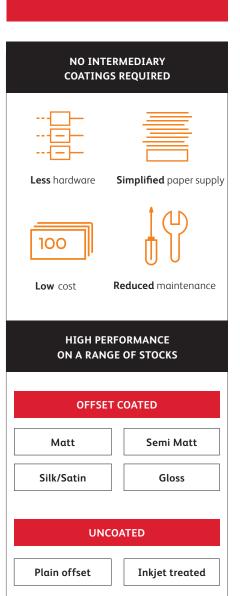



TURN STANDARD PAPER INTO STUNNING HIGH-VALUE PRINT.

High Fusion Inks allow you to achieve brilliant quality on everyday offset coated media. Easily. With a 'wow' factor that was previously unachievable with inkjet, these inks let you migrate high-value applications to the Trivor 2400 Press without sacrificing quality.

PRINT DIRECT TO PAPER. ON OFFSET COATED STOCKS.

When you can print directly on the papers you use for offset jobs today – without any intermediary treatments or precoating – you reduce complexity in a number of ways.

High Fusion Inks are formulated to deliver less moisture to the paper, simplifying the drying process and reducing related energy consumption. And without the need for special paper or extra dryer, coater and primer modules, your savings will add up.

While those savings make an impact on your operation, the true value of High Fusion Inks comes from new opportunities:

- **Simplify your supply chain** by printing directly on the offset coated papers you're running today.
- Migrate static offset jobs for quicker turnaround.
- Add personalisation to boost effectiveness and relevancy.
- **Run high-volume** digital colour jobs more cost-effectively.

MAINTAIN CONSISTENT IMAGE QUALITY.


The Trivor 2400 couples game-changing inks with proven print head technologies and new automation capabilities to make image quality consistently excellent.

- Missing jet detection and compensation automatically detects the occurrence of missing jets and minimises their appearance by exercising neighbouring nozzles.
- Automated density optimisation provides smooth, consistent colour across each page.
- Clear pixel technology maintains print head health and longevity by continuously exercising nozzles without creating waste or impacting finishing.
- Adjustable print speed allows you to slow the press down to 10 m at any time during a production run for on-press inspection, eliminating unexpected results.
- Longer open time of up to 20 minutes results in less wasted ink, more uptime, more leeway in managing production and fewer missing jets.
- Colour Hike optimises drop size, resolution, ink limits and uniformity for more vibrant results on a wider range of stocks.

A ROBUST, HIGH PERFORMER WITH THE INDUSTRY'S SMALLEST FOOTPRINT.

The Trivor® 2400 is the highest-performing small-footprint production inkjet system on the market today, making it a perfect addition to shops with limited floor space or those in need of additional, reliable production.

Save energy with highly efficient drying technology and get more out of every square centimetre of production space with a 511 mm web that delivers 2-up duplex printing in a single tower, offering environmentally friendly production power without serious overhead.




OFFSET-LIKE QUALITY ON COATED STOCKS.

High Fusion inks are optimised to produce image-rich jobs on offset coated papers.



DIRECT MAIL

The use of data to drive relevant offers helps you help marketers address rising postal costs and produce more targeted, higher-value mailers.

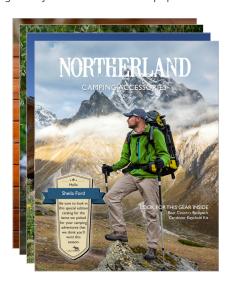

CATALOGUES

Personalised messaging and images based on previous purchases increase response rates and drive online and in-store sales for retailers.



COLOUR BOOKS

Flexible print solutions make it easy to achieve high quality for image-rich jobs while supporting publishers' inventory management strategies in the face of declining volumes.

Get into continuous feed inkjet with confidence.

The Trivor 2400 with High Fusion Ink allows you to take on new work while balancing existing offset and cut-sheet digital jobs, all on a single press. Deliver them all with outstanding quality, efficiency and economics.

Furthermore, the Trivor 2400 continues our scalable inkjet development strategy in a compact footprint that makes your entry into inkjet both easy and affordable. The system is designed to adapt to our continuing ink, media, and imaging innovations so you can build on it over time, ensuring you're always ready for what's next.





Media



Q Quality



Xerox® Trivor® 2400 HF Inkjet Press

TECHNOLOGY

Inkjet Drop-on-demand piezoelectric

Printing process Single tower, single pass 2-up duplex colour

Drop volumes 3, 6, 9 pL

Print resolutions 600 x 600 dpi; 1,200 x 600 dpi Printing speed Uncoated: up to 100 metres per minute Coated: up to 76 metre per minute

Up to 474 mm Printing width

Recommended duty cycle 4-25 million A4 impressions per month (in CMYK, 600 x 600 dpi resolution)

Maximum duty cycle Up to 30 million A4 impressions per month Automated head cleaning (purging, wiping, capping) Head servicing

INKS

Ink types available Aqueous High Fusion pigment ink Configurations 4 colours, simplex or duplex

PAPERS

Paper characteristics Offset coated: matt, silk, gloss; uncoated: plain, inkjet treated. Other papers may be suitable, subject to testing*

Paper weight From 60 to 250 gsm subject to testing*

330 mm-510 mm Paper width

DRYER

Dryer characteristics 67 kW max. (2 dryers x 18 infrared lamps per dryer x 1.85 kW)

PRINT TOWER

Dimensions 3,638 mm x 2,772 mm x 2,316 mm Weight 3,000 kg (simplex), 3,500 kg (duplex)

SOFTWARE INTERFACE SOLUTIONS

Controller aStream Controller

PDF, PDF/VT 1.0, PS (option), IPDS (option), AFP (option), Adobe APPE v4.4 Printer data formats

Key features Insertion of blank pages, banner pages, bar codes, flush lines, merging of files with background form/images,

submission of multiple PDF files as single job, reordering print order, JDF/JMF support, hot folder submission,

job queue management and imposition tools

Ink Estimation Tool Embedded in DFE

Standalone client (option)

CGS-Oris Plug-ins Colour Management Module for iterative colour profiling, device link profiles, iterative spot colour management

and embedded profiles (option) Ink Saver Module (option)

OPERATING ENVIRONMENT

20-30 °C at 40-60% RH Nominal operating conditions Optimal printing quality 23-27 °C at 50% RH Exhaust air Up to 3,000 m³ / h Less than 78 dB Operating noise

Heat output 92,000 BTU (for max dryer assemblies at maximum speed)

100-240 V, 50 A + 400-480 V, 125 A Power supply

Certifications CE, RoHS, UL / CSA, TÜV

OPTIONS (CONTACT US FOR MORE AVAILABLE OPTIONS)

Unwind/Rewind, Punch, Perf, Cut, Fold, Stack or any other compatible finishing device. Finishing

Some devices may require testing and validation.

MODELS	LARGE IMPRESSION max. 474 mm	CONFIGURATION	RESOLUTION (dpi)	(fpm)	MAXIMUM SPEE (letter ipm)	D/PRODUC (mpm)	TIVITY (A4 ipm)
Single Engine Duplex Colour (UNCOATED)	2-up duplex		600 x 600 1200 x 600	328 164	1431 716	100 50	1347 673
Single Engine Duplex Colour (COATED)	2-up duplex		600 x 600 1200 x 600	250 164	1090 716	76 50	1024 673

^{*} Refer to tested media list.

